NOTE: 1. THE ELECTRICIAN SHALL INSTALL ADDITIONAL #12 WIRE TIE SUPPORTS FROM THE CEILING GRID TO THE STRUCTURE ABOVE FOR SUPPORT OF THE LIGHT FIXTURES CLIPPED ON THE GRID.
NOTE: 2. LIGHT FIXTURES ARE TENANT SUPPLIED / CONTRACTOR INSTALLED.
NOTE: 3. MOUNT LIGHTS 10'-0 AFF IN STOCKROOM.

REFLECTED CEILING LEGEND

- 2'-0"X4'-0" ACOUSTICAL CEILING TILE AND GRID- SEE FINISH NOTE 4.
- GWB - PAINT WHITE UNLESS OTHERWISE NOTED.
- NL 8'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON NIGHT LIGHT CIRCUIT. SURFACE MOUNT TO GWB AND ACT CEILING.
- 8'-0" STRIP LED LIGHT FIXTURE. SURFACE MOUNT TO GWB AND ACT CEILING.
- 8'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON EMERGENCY LIGHT CIRCUIT WITH BATTERY PACK. SURFACE MOUNT TO GWB AND ACT CEILING. FOR FIXTURES WITH 4 LAMPS, THE EMERGENCY BATTERY PACK WILL ONLY OPERATE 2 OF THE LAMPS.
- NL 4'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON NIGHT LIGHT CIRCUIT. SURFACE MOUNT TO TO GWB AND ACT CEILING.
- 4'-0" STRIP LED LIGHT FIXTURE. SURFACE MOUNT TO ACT AND GWB CEILING.
- 4'-0" STRIP LED LIGHT FIXTURE WITH LAMPS ON EMERGENCY LIGHT CIRCUIT WITH BATTERY PACK. SURFACE MOUNT TO TO GWB AND ACT CEILING.
- EXIT LIGHT
- VENTILATION FAN
- CEILING HEIGHT ABOVE FINISH FLOOR
- DIFFUSER
- RETURN AIR GRILLE
- SPRINKLER HEAD (SHOWN FOR INFORMATIONAL PURPOSES ONLY. SPRINKLER CONTRACTOR SHALL PREPARE DRAWINGS AS REQUIRED BY CODE FOR RELOCATION OR ADDITION OF HEADS.)
- POWER POLE
- EMERGENCY LIGHT FIXTURE

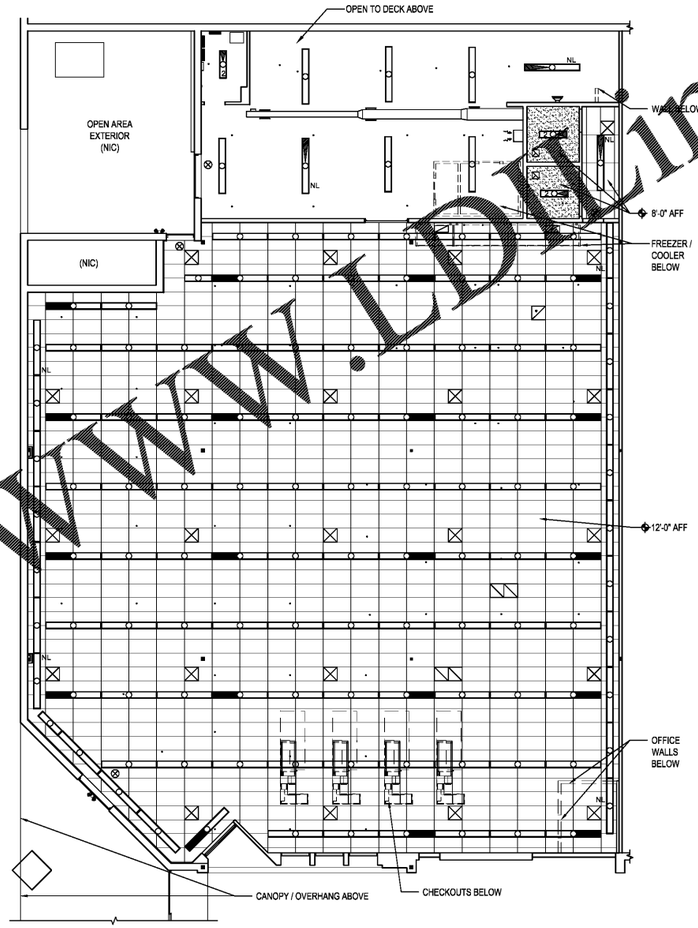

REFLECTED CEILING PLAN
SCALE: 1/8" = 1'-0"
NORTH

Order Plans @ WWW.LDILine.com

mark	date	by	description
revisions			

date 4/10/2018
project 18109-68
designed JCW
drawn KJP
checked DAE

RRMM
ARCHITECTS, PC
Donna A Elliott, Architect
1317 Executive Blvd, Suite 200
Chesapeake, VA 23320
(757)622-2828 / fax (757)622-6683

project
DOLLAR TREE
MIDDLESBORO MALL, DEAL #11346
MIDDLESBORO, KENTUCKY
drawing
REFLECTED CEILING PLAN

sheet
A2