




6014 BARDSTOWN ROAD  
LOUISVILLE, KY 40291



SEWELL AND SPWELL ARCHITECTS  
996 WILKINSON TRACE, SUITE B4  
BOWLING GREEN, KY 42103  
PH: 270.994.0388  
www.sewellarchitects.com

GENERAL NOTES, SYMBOL LEGEND, AND PARTITION SCHEDULE

JOB NO. 1908  
DATE MARCH 20, 2019  
DRAWN MAS  
CHECKED NBS  
COPYRIGHT © 2019 SEWELL AND SPWELL ARCHITECTS, PLLC


SHEET

A0.1

GENERAL NOTES

- G1 (NIC) MEANS NOT IN CONTRACT. TO BE PROVIDED BY OWNER AND INSTALLED BY OWNER.
G2 DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS.
G3 ALL DIMENSIONS SHOWN ARE TO FACE OF MASONRY OR FACE OF STUDS. MASONRY DIMENSIONS ARE NOMINAL.
G4 REFER TO ENLARGED FLOOR PLANS FOR DIMENSIONS NOT SHOWN ON GENERAL FLOOR PLANS.
G5 SYMBOLS THAT REPRESENT MEP ITEMS ON ARCHITECTURAL DRAWINGS ARE FOR GRAPHIC PURPOSES ONLY.
G6 ALL CHANGES IN FLOOR FINISHES SHALL OCCUR AT FOUR THRESHOLDS TYPICAL.
G7 ALL CONTRACTORS SHALL REVIEW DRAWINGS FOR MATERIALS AND MANUFACTURERS MODEL NUMBERS LISTED ON DRAWINGS.
G8 CONTACT BETWEEN DISSIMILAR METALS SHALL BE SEPARATED WITH BUTYL TAPE OR OTHER APPROVED MEANS TO PREVENT GALVANIC CORROSION.
G9 CONTRACTOR SHALL PROVIDE CONCEALED BLOCKING REQUIRED FOR ATTACHMENT AND SUPPORT OF...
G10 GYPSUM CEILING BOARD SHALL BE USED AT ALL HORIZONTAL APPLICATIONS OF GYPSUM BOARD.
G11 EXPOSED CORNERS AND EDGES OF GYPSUM BOARD SHALL BE FINISHED WITH CORNER BEAD OR J-BEAD...
G12 IF INTERIOR PARTITION WALLS EXTEND FULL HEIGHT PROVIDE CLOSURE TO DECK OR ROOF WITH BATT INSULATION OR FIRE-SAFING AS REQUIRED. ANY ADJACENT A.F.F. DESIGNATION IDENTIFIES A SPECIFIC PARTITION HEIGHT.
G13 CONTRACTOR SHALL VERIFY ALL ROUGH OPENING SIZES FOR WINDOWS AND DOORS AND COORDINATE ANY REQUIRED ADJUSTMENTS WITH THE ARCHITECT.
G14 ALL ANCHORS, FASTENERS, ETC. IN CONTACT WITH P.T. WOOD COMPONENTS SHALL BE STAINLESS STEEL OR G-90 (MIN) HOT-DIPPED GALVANIZED.
G15 ALL WOOD BLOCKING, NAILERS, SILL PLATES, ETC. IN CONTACT WITH SLABS-ON-GRADE OR EXTERIOR MASONRY OR CONCRETE SHALL BE PRESSURE-PRESERVATIVE TREATED (P.T.). REFER TO THE DRAWINGS FOR OTHER LOCATIONS WHERE P.T. WOOD IS REQUIRED.
G16 ALL P.T. WOOD COMPONENTS SHALL BE SEPARATED FROM CONTACT WITH ADJACENT METALS WITH PERMANENTLY AFFIXED 1/8" FELT, SELF-ADHERING ELASTOMERIC MEMBRANE, OR OTHER SUCH PERMANENT NON-CORROSIVE SEPARATION MATERIAL.
G17 ALL WORK PERFORMED SHALL BE IN STRICT COMPLIANCE WITH ALL GOVERNING BUILDING CODES, REQUIREMENTS (FEDERAL, STATE AND LOCAL), FIRE, ADA, AND APPLICABLE HEALTH DEPARTMENT CODES. SHALL BE EXECUTED IN ACCORDANCE WITH ACCEPTED INDUSTRY STANDARDS, AND SHALL CONFORM TO SPECIFIC REGULATIONS AS MANDATED BY THE OWNER, THE ARCHITECT, AND THE AUTHORITIES HAVING JURISDICTION. IT IS THE GENERAL CONTRACTOR'S RESPONSIBILITY TO ENSURE THE PROCUREMENT OF REQUIRED AND NECESSARY PERMITS AND APPROVALS PRIOR TO THE COMMENCEMENT OF ANY WORK, AND CERTIFICATE OF OCCUPANCY UPON COMPLETION OF PROJECT.
G18 UNLESS OTHERWISE PROVIDED IN THE CONTRACT DOCUMENTS, THE CONTRACTOR SHALL SECURE AND PAY FOR THE BUILDING PERMIT AND OTHER PERMITS AND GOVERNMENTAL FEES, LICENSES AND INSPECTIONS NECESSARY FOR PROPER EXECUTION AND COMPLETION OF THE WORK. THE CONTRACTOR SHALL COMPLY WITH AND GIVE NOTICES REQUIRED BY LAWS, ORDINANCES, RULES, REGULATIONS, AND LAWFUL ORDERS OF PUBLIC AUTHORITIES BEARING ON PERFORMANCE OF THE WORK. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL PERMITS, FEES, CERTIFICATES OF INSPECTION AND APPROVAL, ETC.
G19 ALL FINISH ITEMS SUCH AS HARDWARE, PLUMBING AND ELECTRICAL FIXTURES, KITCHEN EQUIPMENT, SIGNAGE AND MATERIAL, TEXTURES AND COLORS SHALL BE APPROVED BY THE ARCHITECT AND OWNER PRIOR TO INSTALLATION.
G20 PRE-FINISHED ITEMS WHICH ARE DAMAGED EITHER BEFORE OR AFTER INSTALLATION SHALL BE REPLACED BY THE CONTRACTOR WITH NEW AND UNDAMAGED MATERIAL. MATERIALS FINISHED AFTER INSTALLATION WHICH ARE DAMAGED SHALL BE REPLACED OR REFINISHED AS PER THE OWNER'S REQUEST. NOTIFY THE ARCHITECT AND OWNER.
G21 THE CONTRACTOR IS RESPONSIBLE FOR REMOVAL OF TRASH AND DEBRIS FROM JOB SITE ON A DAILY BASIS. FINAL CLEANUP WITHIN SCOPE OF WORK. REMOVE DUST, DEBRIS, OILS, STAINS, FINGERPRINTS AND LABELS FROM ALL EXPOSED, FINISHED SURFACES AND CLEAN ALL WINDOWS AND BLINDS. WAX AND/OR VACUUM FLOORS PER MANUFACTURER'S RECOMMENDATIONS. THOROUGHLY CLEAN ALL LIGHT LENSES AND AIR FILTERS, AND CHANGE ALL DIRTY FILTERS. ALL WASTE MATERIAL, RUBBISH, TOOLS, CONSTRUCTION EQUIPMENT, MACHINERY, AND OTHER SURPLUS MATERIALS SHALL BE REMOVED FROM THE SITE PRIOR TO TURN-OVER DATE.
G22 ALL WORK SHALL BE CHECKED AND ACCEPTED BY THE ARCHITECT AND OWNER DURING THE FINAL PUNCH LIST WALK-THRU BEFORE PROJECT CAN BE CONSIDERED COMPLETE.
G23 THE CONTRACTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE SPECIFICATIONS, SCHEDULES, ETC. INCLUDED IN THESE DRAWINGS AND THE SPECIFICATIONS. THE CONTRACTOR SHALL CAREFULLY STUDY AND COMPARE THESE DRAWINGS AND THE SPECIFICATIONS AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING OF ANY INCONSISTENCIES. THE MOST STRINGENT OR HIGHER COST CONDITION SHALL GOVERN AND BE PROVIDED IN 9.03B.
G24 THE GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION, AIA DOCUMENT A201, 2007 EDITION, PUBLISHED BY THE AMERICAN INSTITUTE OF ARCHITECTS, SHALL BE MODIFIED BY THE OWNER'S 'SUPPLEMENTARY CONDITIONS'. SHALL BE THE CONDITIONS ON WHICH THE CONTRACTOR HAS ACCEPTED THIS WORK SHALL BE BASED.
G25 THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING AN ACCURATE SET OF DOCUMENTS ON THE JOBSITE. THE CONTRACTOR IS RESPONSIBLE TO COMMUNICATE ALL CHANGES AND CLARIFICATIONS WITH THE APPROPRIATE CODES OFFICIALS AS REQUIRED.
G26 THE CONTRACTOR SHALL TAKE FIELD MEASUREMENTS AND VERIFY FIELD CONDITIONS AND SHALL CAREFULLY COMPARE SUCH FIELD MEASUREMENTS, CONDITIONS, AND OTHER INFORMATION KNOWN TO THE CONTRACTOR WITH THE CONTRACT DOCUMENTS BEFORE COMMENCING ACTIVITIES. ERRORS, INCONSISTENCIES OR OMISSIONS DISCOVERED SHALL BE REPORTED TO THE ARCHITECT IN WRITING PRIOR TO BID.
G27 THE GENERAL CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK, USING THE CONTRACTOR'S BEST SKILL AND ATTENTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR AND HAVE CONTROL OVER CONSTRUCTION SAFETY, MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT.
G28 THE CONTRACTOR SHALL COORDINATE THE LOCATION AND INSTALLATION OF BUILDING SYSTEMS AND EQUIPMENT AND VERIFY THAT REQUIRED CLEARANCES FOR INSTALLATION AND MAINTENANCE OF THE FOLLOWING EQUIPMENT AND ASSOCIATED WORK ARE PROVIDED. THIS INCLUDES BUT IS NOT LIMITED TO THE FOLLOWING SYSTEMS: MECHANICAL, ELECTRICAL, LIGHTING, PLUMBING, TELEPHONE AND SPRINKLER EQUIPMENT.
G29 CONTRACTOR SHALL LOCATE ALL EXISTING UTILITIES PRIOR TO THE BEGINNING CONSTRUCTION AND PROTECT DURING CONSTRUCTION.
G30 THE CONTRACTOR SHALL COORDINATE WITH ALL BUILDING TRADES INVOLVED IN THE PROJECT TO ENSURE PROPER CLEARANCES FOR FIXTURES, DUCTS, CEILING, ETC. CONTRACTOR SHALL COORDINATE ALL TRADES INCLUDED TO MAINTAIN THE CEILING HEIGHTS NOTED ON THE DRAWINGS. ANY CONFLICTS SHALL BE REPORTED IN WRITING TO THE ARCHITECT. WHEN REQUIRED BY THE PROJECT SPECIFICATIONS THE CONTRACTOR SHALL PREPARE COMPOSITE SHOP DRAWINGS OF ALL TRADES INVOLVED IN AN INSTALLATION.
G31 CAULK AT ALL JUNCTURES OF INTERIOR FACES OF DISSIMILAR MATERIALS EVEN WHERE JOINT MAY NOT BE READILY VISIBLE. CAULK SELECTION SHALL BE APPROPRIATE FOR USE WITH THE ADJOINING MATERIALS.
G32 MATERIALS PROVIDED BY THE CONTRACTOR TO COMPLETE THE SCOPE OF WORK IN THESE DOCUMENTS SHALL INSTALL PER MANUFACTURER'S WARRANTY REQUIREMENTS AND PER CURRENT BUILDING CODES.
G33 ITEMS REQUIRING FINISH SELECTION THAT DO NOT APPEAR IN THE CONSTRUCTION DOCUMENTS SHALL BE SELECTED FROM SHOP DRAWING, SUBMITTALS AND / OR SAMPLES SUBMITTED BY THE CONTRACTOR FOR REVIEW.
G34 PIPING LOCATED ABOVE GRADE AND INSIDE FINISHED AREAS OF THE BUILDING SHALL BE CONCEALED IN FURRED SPACES WITH THE EXCEPTION OF EQUIPMENT ROOM AND WASH TUNNEL. THE CONTRACTOR SHALL COORDINATE WITH OTHER TRADES TO PROVIDE FURRING WITH PIPING INSTALLED IN FINISHED AREAS. THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE ARCHITECT AND OWNER PRIOR TO LOCATING AND / OR PROVIDING ANY 'FURRED SPACES' WHICH ARE NOT SPECIFICALLY INDICATED IN THE CONSTRUCTION DOCUMENTS.

SYMBOL LEGEND

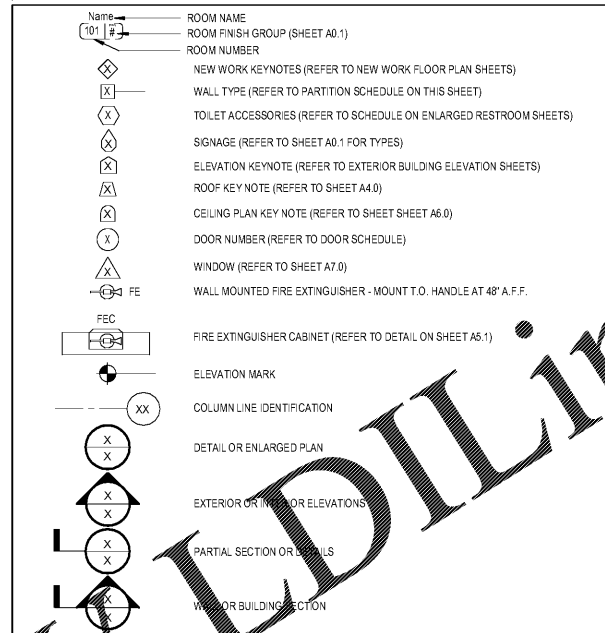

GENERAL NOTES CONTINUED

- G35 POWER, DATA, AV, TELEPHONE, SECURITY, OVERHEAD AND THRU PHONE PAGING, DEDICATED POWER ETC. SHALL BE REVIEWED AND CONFIRMED WITH ARCHITECT AND OWNER'S SUB-VENDORS PRIOR TO COMMENCEMENT OF WORK. FINAL LOCATION DRAWINGS TO BE PROVIDED BY SUB-VENDOR / SUB-CONTRACTOR AS REQUIRED. CONTRACTOR SHALL NOTIFY ARCHITECT AND OWNER WHEN SUB-VENDORS ARE REQUIRED AT PROJECT SITE TO INSTALL TELEPHONE, DATA, AV, AND SECURITY COMPONENTS.
G36 WATER RESISTANT GYPSUM BOARD SHALL BE USED BEHIND ALL PLUMBING FIXTURES.
G37 PROVIDE TRANSITION STRIPS AT ALL CHANGES IN FLOOR FINISH.
G38 FOR ALL WALL / PARTITION ASSEMBLIES USING GWB, THE CONTRACTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE MOST CURRENT EDITION OF THE GYPSUM ASSOCIATION GA-400 FIRE RESISTANCE DESIGN MANUAL, THE MOST CURRENT EDITION OF THE UNDERWRITERS LABORATORIES U.L. FIRE RESISTANCE DIRECTORY, AND THE MOST CURRENT EDITION OF THE GYPSUM CONSTRUCTION HANDBOOK AS PUBLISHED BY THE U.S.G. CORPORATION. ALL GWB SHALL BE CUT SO THAT THE CLEARANCE BETWEEN ELECTRICAL OUTLET BOXES AND THE GWB DOES NOT EXCEED 1/8". ALL GWB ASSEMBLIES SHALL RECEIVE A LEVEL FOUR FINISH.
G39 FIRE EXTINGUISHER, ELECTRICAL PANELS, TELEPHONE EQUIPMENT BOARDS, ETC. SHALL BE LOCATED IN ACCORDANCE WITH REQUIREMENTS OF GOVERNING AGENCIES HAVING JURISDICTION. ANY LOCATIONS NOT SHOWN SHALL BE VERIFIED WITH ARCHITECT AND OWNER PRIOR TO ROUGH-IN AND INSTALLATION. UNLESS OTHERWISE NOTED, THE ABOVE PANELS AND/OR EQUIPMENT SHALL BE FULLY RECESSED AND MAINTAIN INTEGRITY OF WALL FIRE RATING REQUIREMENTS.
G40 THESE DRAWINGS ARE THE PROPERTY OF THE ARCHITECT OF RECORD, AND SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT. THESE DRAWINGS ARE TO BE USED FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN AND SHALL NOT BE USED ON ANY OTHER PROJECT. THESE DRAWINGS ARE A COMPOSITE SET AND SHALL NOT BE SEPARATED FOR DISTRIBUTION. THE GENERAL CONTRACTOR SHALL REVIEW ALL DRAWINGS AND DISTRIBUTE THE ENTIRE SET TO EACH SUBCONTRACTOR.
G41 ALL DASHED EQUIPMENT SHALL BE OWNER FURNISHED EQUIPMENT (O.F.E.). THE CONTRACTOR SHALL COORDINATE WITH OWNER OR VENDOR ON INSTALLATION OF EQUIPMENT, INCLUDING REQUIRED CLEARANCES AND CONNECTIONS.
G42 ALL PARTIES RESPONSIBLE FOR DELIVERING FINISHES TO THE SITE SHOULD CHECK QUANTITIES AND DELIVERY DATES AS SOON AS POSSIBLE TO AVOID ANY RESELECTION OF MATERIALS.
G43 THE MEANS AND METHODS OF CONSTRUCTION, AND TEMPORARY STRUCTURES AND FACILITIES, ARE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR. THE ARCHITECT DOES NOT ASSUME ANY RESPONSIBILITY FOR THE CONTRACTOR'S MEANS AND METHODS OR FOR TEMPORARY STRUCTURES.
G44 JOB SITE SAFETY AND SECURITY ARE THE SOLE RESPONSIBILITY OF THE GENERAL CONTRACTOR. THE G.C. SHALL CONSULT WITH LOCAL FIRE AUTHORITIES TO ASCERTAIN REQUIREMENTS FOR FIRE SUPPRESSION AND SAFETY DURING CONSTRUCTION. THE G.C. IS SOLELY RESPONSIBLE FOR MEETING OSHA REGULATIONS DURING CONSTRUCTION.
G45 THE GENERAL CONTRACTOR IS SOLELY RESPONSIBLE FOR STORAGE AND PROTECTION OF BUILDING MATERIALS, AND INSTALLED CONSTRUCTION, FROM INCLEMENT WEATHER, THEFT, AND OTHER HAZARDS. THE G.C. SHALL FOLLOW ALL MANUFACTURER'S RECOMMENDATIONS FOR STORAGE OF MATERIALS. PARTIALLY COMPLETED WALLS SHALL BE COVERED TO PROTECT FROM WATER INTRUSION, DAMAGE, INCLUDING BUT NOT LIMITED TO MOLD, RESULTING FROM WATER INTRUSION DURING CONSTRUCTION SHALL BE REPAIRED AT THE G.C.'S EXPENSE.
G46 CAULK ALL PLUMBING FIXTURES, MILLWORK, TRIM, DOOR AND WINDOW FRAMES TO ADJACENT SURFACES. CAULK COLOR TO MATCH ADJACENT FINISH. SUBMIT COLORS FOR APPROVAL.
G47 PROVIDE IN-WALL WOOD BACKING IN PARTITION AT ALL LOCATIONS WHERE WORK SURFACES, SHELVING, BRACKETS, DISPLAYS AND/OR EQUIPMENT WILL BE MOUNTED OR ATTACHED TO FACE OF WALL.
G48 FLOOR TOLERANCE: IN LAYING OUT AND DETAILING THE WORK TO BE COMPLETED, CONSIDERATION IS TO BE GIVEN TO VARIATIONS IN FLOOR LEVELNESS RESULTING FROM CONSTRUCTION QUALITY PLUS LIVE AND DEAD LOADS IMPOSED ON THE STRUCTURE. FIELD VERIFICATIONS ARE TO BE MADE OF CONDITIONS TO VERIFY CONSTRUCTION TOLERANCES, ALIGNMENT OF DOOR HEADS AND OTHER HORIZONTAL ELEMENTS ARE TO BE MAINTAINED AT A CONSTANT LEVEL, AND SHALL NOT FOLLOW VARIATIONS IN FLOOR PLANE. LEVEL FLOORS AS REQUIRED USING AN APPROVED LEVELING COMPOUND.
G49 ACCESSIBILITY COMPLIANCE: THIS IS TO CERTIFY THAT THESE PLANS HAVE BEEN PREPARED IN CONFORMITY WITH ICC/ANSI A117.1 CODE FOR MAKING BUILDINGS AND FACILITIES ACCESSIBLE AND USABLE BY PHYSICALLY HANDICAPPED PEOPLE TO THE BEST OF OUR PROFESSIONAL KNOWLEDGE, INFORMATION AND BELIEF FOR THE SCOPE OF THE WORK HEREIN PERMITTED.
G50 PROVIDE 12" MINIMUM CLEARANCE FOR HANDICAPPED ACCESS FROM EDGE OF ALL DOORS ON "PUSH" SIDE OF THE ADJACENT FINISHED WALL SURFACE. PROVIDE 18" MINIMUM CLEARANCE FOR HANDICAPPED ACCESS FROM EDGE OF ALL DOORS ON THE "PULL" SIDE TO THE ADJACENT FINISHED WALL.
G51 FOR ALL PRODUCTS INSTALLED, REFER TO MANUFACTURER SPECIFICATIONS FOR INSTALLATION.
G52 REFER TO STRUCTURAL DRAWINGS FOR VERTICAL REINFORCING IN CMU WALLS, POURED CONCRETE SLABS AND FOUNDATIONS.

GENERAL ROOM SIGNAGE NOTES

- 1. ALL TEXT SHALL BE SIMPLE SERIF STYLE, UNLESS NOTED OTHERWISE.
2. CHARACTERS SHOWN ON SIGNAGE DETAILS ARE COMPUTER GENERATED. CORRECT "VISUAL" SPACING IS THE RESPONSIBILITY OF THE SIGNAGE SUPPLIER AND IS SUBJECT TO THE ARCHITECT'S APPROVAL.
3. PICTOGRAMS ARE SHOWN HEREIN FOR INFORMATION AND INTENT ONLY. MECHANICAL, CAMERA - READY ARTWORK SHALL BE SUPPLIED BY THE SIGNAGE SUPPLIER.
4. ALL BACKGROUNDS ON PLASTIC SIGNS SHALL BE COLOR 1. ALL TEXT AND PICTOGRAMS ON PLASTIC SIGNS SHALL BE COLOR 2. COLORS OF PANEL, SIGNS AND TEXT TO BE SELECTED BY OWNER.
5. UNLESS NOTED OTHERWISE, ALL SIGNS LOCATED BESIDE DOORS SHALL BE MOUNTED AT 5' 2" A.F.F. TO THE TOP OF THE SIGN AND 2' CLEAR FROM THE EDGE OF THE DOOR FRAME ON THE LATCH SIDE. AT DOUBLE DOORS, THE SIGN SHALL BE LOCATED ON THE SIDE INDICATED. WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, INCLUDING AT DOUBLE LEAF DOORS, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL. MOUNTING LOCATION FOR SUCH SIGNAGE SHALL BE PLACED SO THAT A PERSON MAY APPROACH WITHIN 3 INCHES OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF A DOOR. THE ARCHITECT SHALL BE CONSULTED BEFORE PLACEMENT OF SIGNAGE FOR LEFT HAND AND RIGHT HAND ORIENTATION OF SIGNS.
6. ALL LETTERS, NUMERALS AND PICTOGRAMS SPECIFICALLY INDICATED TO BE RAISED ON SIGN SHALL BE RAISED 1/32".
7. ALL BRAILLE SHALL BE DOMED GRADE 2. UNLESS NOTED OTHERWISE, BRAILLE SHALL DESCRIBE FULL CONTENTS OF SIGN (ROOM NAME AND NUMBER AS INDICATED).
8. ALL SIGNAGE (INCLUDING LETTERS AND PICTOGRAM SIZE) SHALL MEET THE REQUIREMENTS OF AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES.
9. ALL SIGNS SHALL BE MECHANICALLY FASTENED PER MANUFACTURER'S REQUIREMENTS.

ROOM FINISH GROUPS

- GENERAL NOTES:
1. WHERE MORE THAN ONE FINISH IS LISTED REFER TO PLANS, SECTIONS, AND DETAILS.
2. REFER TO TYPICAL FLOOR TRANSITION / THRESHOLD DETAILS ON SHEET A&0.
3. REFER TO REFLECTED CEILING PLAN ON SHEET A7.0 FOR CEILING HEIGHTS.
4. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION AT CEILINGS.
FLOOR: EXPOSED CONCRETE SLAB WITH CONCRETE SEALER
BASE: SEALANT CONTINUOUS AROUND PERIMETER
WALLS: CORLAR 2-1-ST SATIN HIGH SOLIDS EPOXY MASTIC BASE COAT WITH IRONON 2-1-HG + POLYURETHANE HIGH GLOSS TOPCOAT EXPOSED STRUCTURE (PAINT)
CEILING: EXPOSED STRUCTURE (PAINT)
FLOOR: EXPOSED CONCRETE SLAB WITH CONCRETE SEALER
BASE: SEALANT CONTINUOUS AROUND PERIMETER
WALLS: RELINE PANELING SYSTEM BY NUFORM BUILDING TECHNOLOGIES, INC. ATTACHED DIRECTLY TO CMU.
CEILING: RELINE PANELING SYSTEM BY NUFORM BUILDING TECHNOLOGIES, INC. ATTACHED TO 1/2" PLYWOOD AT UNDERSIDE OF ROOF TRUSSES.
FLOOR: STAINED CONCRETE SLAB WITH CONCRETE SEALER
BASE: 4" VINYL BASE
GYPSUM BOARD (PAINT)
2x2x3/4" SUSPENDED ACOUSTICAL CEILING. USG ECLIPSE CUMPARUS, TILE WHITE IN COLOR. SHADOWLINE TAPERED EDGE WITH BLACK 15/16" GRID OR APPROVED EQUAL.

ROOM FINISH LEGEND

- PAIN:
-BLOCK/FILLER AT EXTERIOR SPILT-FACE CMU:
-SHERWIN WILLIAMS
-B42W46 -HD BLOCK FILLER
-CUSTOM COLOR
-TOP COAT AT EXTERIOR SPILT-FACE CMU:
-SHERWIN WILLIAMS
-A82W151 -A100 LTX SA EXTRA
-CUSTOM COLOR
-EXPOSED CEILING IN EQUIPMENT ROOM (PRIMER):
-SHERWIN WILLIAMS
-Y24W8020 -EXT. ALK. WOOD PRIMER
-WHITE
-EXPOSED CEILING IN EQUIPMENT ROOM (TOP COAT):
-SHERWIN WILLIAMS
-B66W611 -PH-HP AC GL EXTRA
-WHITE

WALL / PARTITION GENERAL NOTES AND SCHEDULE

WALL / PARTITION GENERAL NOTES AND SCHEDULE. Includes diagrams for Exterior Walls (A, B, C, D) and Interior Walls (1-6) with detailed construction notes and dimensions.