

MIAMI-DADE COUNTY
 DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (DRER)
 BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
 PRODUCT CONTROL SECTION
 11805 SW 26 Street, Room 206
 Miami, Florida 33175-2476
 T (305) 315-2999 F (305) 315-3090
 www.miamidade.gov/proccontrol

NOTICE OF ACCEPTANCE (NOA)
 Peterson Aluminum Corporation
 102 Northpoint Parkway, Bldg. 106
 Acworth, GA. 30120

SCOPE:
 This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may unconditionally revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Snap-Clad .032" (min.) x 16" and 18" Wide Aluminum Panel over Wood Deck

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL: of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION: of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises and renews NOA 16-1107.09 and consists of pages 1 through 5.

The submitted documentation was reviewed by **Freddy Semino**

NOA No: 17-1002.12
 Expiration Date: 12/31/24
 Approval Date: 11/09/17
 Page 1 of 5

ROOFING SYSTEM APPROVAL:
 Category: Roofing
 Sub-Category: Metal Panels (Non-Structural)
 Material: Aluminum
 Deck Type: Wood
 Maximum Design Pressure: -153.5 psf.

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

Product	Dimensions	Test Specifications	Product Description
Snap-Clad .032" x 16" Wide Aluminum Panel	Length: various Height: 1 3/4" Width: 16" & 18" Thickness: 0.032"	TAS 110	Concrete resistant perforated standing seam, coated, pre-finished aluminum panels.
Individual Clip	Length: 3.5" Height: 1.875" Width: 1.982" Thickness: .20 ga.	TAS 116	20 ga. galvanized steel clip with 2 holes, or 20 ga. stainless steel clip with 2 holes.

EVIDENCE SUBMITTED:

Test Agency	Test Identifier	Test Name/Report	Date
Valpar	433XS15	ASTM B 117	11/21/11
Valpar	431B173	ASTM D 4587, ASTM G 23	11/21/11
Architectural Testing	73784.01-109-18	TAS-100	08/10/07
	D0841 01-450-18-r2	TAS-125	10/03/16

APPROVED ASSEMBLIES:
 Systems: Snap-Clad .032" x 16" or 18" Wide Aluminum Panel
 Deck Type: Wood, Non-insulated
 Deck Description: New Construction 1/2" or greater plywood or wood plank, or for re-roofing 15/32" or greater plywood.
 Slope Range: 2" : 12" or greater
 Maximum Uplift Pressure: See Table A Below

Deck Attachment: In accordance with applicable Building Code, but in no case shall it be less than 8d x 2" ring shank nails spaced 6" o.c. In reroofing, where the deck is 1/2" thick (Minimum 3/8") the above attachment method must be in addition to existing attachment.
Underlayment: Minimum Underlayment shall be an ASTM D 226 Type III polypropylene minimum 4" side-lap and 6" end-lap. Underlayment shall be applied with corrosion resistant tin-caps and 12 gauge 1 3/4" annular ring-shank nails, spaced 6" o.c. at laps and staggered rows 12" o.c. in the field of the roof. An approved underlayment having a current NOA.

Fire Barrier Board: Any approved fire barrier having a current NFPA Reference current fire directory listing for fire ratings of this roof assembly assembly as well as the location of the fire barrier within the assembly. See Attachment #1.

Valleys: Valley construction shall be in compliance with Roofing Application Standard RAS 133 and with the current published installation instructions and details in PAC Contractors Association's Roofing Installation Manual.



Metal Panels and Accessories: The "Snap-Clad .032" x 16" Wide Aluminum Panel" panels including flashing penetrations, valleys, and laps and accessories in compliance PAC Contractors Association's current published installation instructions and in compliance with the current requirements detailed in Roofing Application Standard RAS 133.
 Panels shall be installed along the rib with SNAP CLAD Clips secured with #10 x 1.5" hex head screws (2 per clip); the screws shall be of sufficient length to penetrate through the sheathing a minimum of 3/4". The female rib of panel is snapped over the male rib of panel. Panel clips shall be spaced a maximum distance listed below in Table A.
 1. Extrapolation shall not be allowed.

TABLE A
 MAXIMUM DESIGN PRESSURES

Roof Areas	Field	Perimeter and Corner ¹
Maximum Design Pressures	-86 psf.	-153.5 psf.
Clip Type	Individual	Individual
Maximum Clip Spacing	24" o.c.	6" o.c.

- LIMITATIONS**
- Fire classification is not part of this acceptance; refer to a current Approved Roofing Materials Directory for fire ratings of this product.
 - The maximum designed pressure listed herein shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners).
 - Panels may be roll formed in continuous lengths from eave to ridge. Maximum lengths shall be as described in Roofing Application Standard RAS 133.
 - All panels shall be permanently labeled with the manufacturer's name and/or logo, city, state, and the following statement: "Miami-Dade County Product Control Approved" or with the Miami-Dade County Product Control Seal as seen below. All clips shall be permanently labeled with the manufacturer's name and/or logo, and/or model.

- All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.
- Panels may be shop or jobsite roll formed with machine models #10110684, E99578969, or 01110972 from PAC Contractors Association or manufactured at Peterson Aluminum Corporation's plant in Acworth, GA.

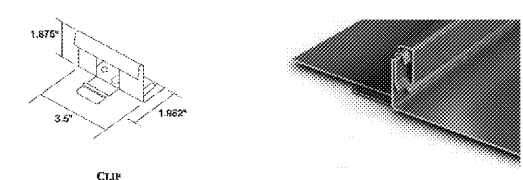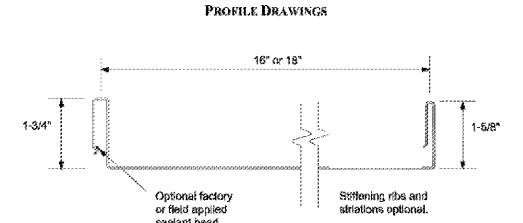

END OF THIS ACCEPTANCE

Order Plans @ www.LDILine.com

Fleischman Garcia
 ARCHITECTURAL ENGINEERING
 14000 BAYVIEW BLVD., SUITE 100
 MIAMI, FL 33141
 PHONE (305) 331-4000
 FAX (305) 331-4000
 REGISTRATION NUMBER: AA 000013

Pasco County Fire & Rescue Station No. 17
 New Port Richey, Florida

THIS DESIGN AND DRAWING IS THE SOLE PROPERTY OF PASCO COUNTY. IT SHALL NOT BE REPRODUCED, COPIED, OR REPRINTED WITHOUT THE WRITTEN PERMISSION OF PASCO COUNTY.

FGA PROJECT NUMBER
 19039

ISSUE DATE
 05-25-20

SHEET NUMBER
 PA-9

PRODUCT APPROVAL - FASCIA

A1
 NTS